

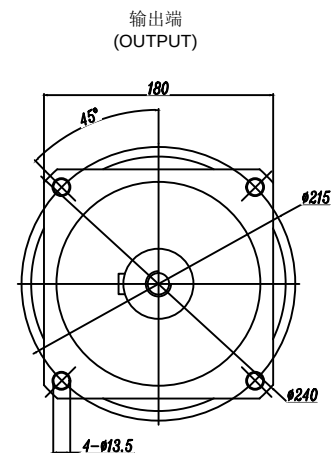
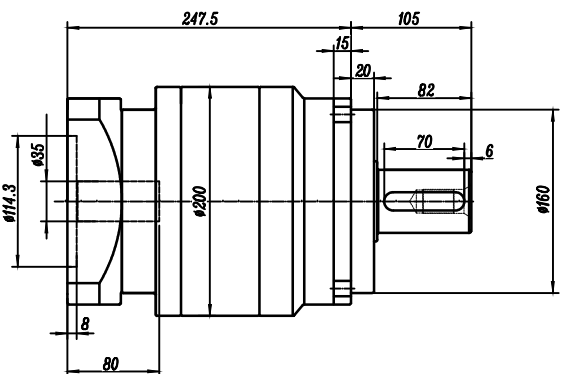
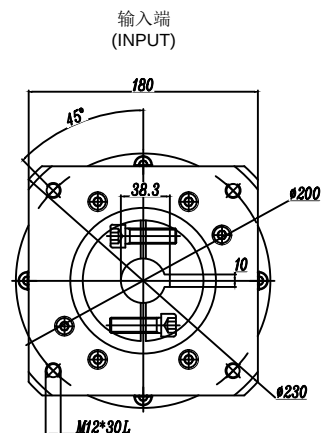



S1光軸:



S2帶鍵:



S3孔出:



安全注意事項 一:本產品為精密件,安裝時應小心裝入,嚴禁敲打。 二:裝配減速器與電機相連時,先確認電機凸台尺寸與減速器的凹槽尺寸是否一致,再進行正確的安裝使用。 三:需要在室外可受粉塵、水滴影響的場所使用時,或超過可承受的溫度環境下使用,請事先與本公司聯繫。 四:請注意運行時不要超負荷使用,超負荷使用時會影響減速器使用壽命。 五:本公司減速器可適配所有伺服電機,可為客戶非標定制減速器	減速比	12	15	16	20	25	28	30	35	40	50	60	70	80	100	P2:≤7arcmin 精密背隙: P1:≤5arcmin P0:≤3arcmin	圖紙確認:	
	額定輸出扭矩NM	790	800	1020	1050	1200	1200	1200	1200	1200	1000	1120	1100	1010	1080		輸入尺寸: Ø35-Ø114.3-Ø200-M12	
	最大輸出扭矩NM	2370	2400	3060	3150	3600	3600	3600	3600	3600	3000	3360	3300	3030	3240	臺灣上瀛精工企業社		
	容許徑向力: 14500N							額定輸入轉速: 3000r/min							噪音值: ≤68dB			
	容許軸向力: 7300N							最大輸入轉速: 6000r/min							全負載時效率: ≥94%			
	防護等級: IP65							使用溫度: -15℃~+90℃							重量: 34KG			上瀛傳動科技(上海)有限公司
行星減速機VRB180-L2-S2-P2																		
網址: www.sty-gear.com/tw																		
聯系電話: 021-34975005																		